





408 liters
28,800 samples

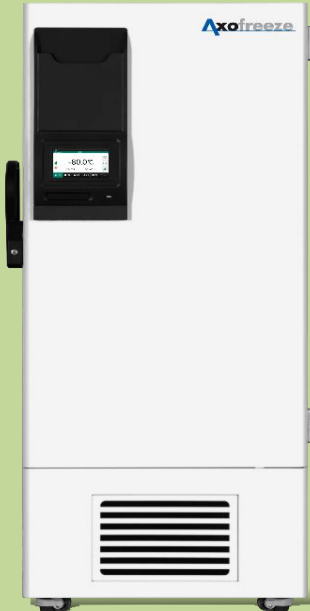

Axofreeze - 408E

-86°C ULT freezer is specially designed and manufactured for long term storage of various biological products, including viruses, germs, erythrocytes, leucocyte and cutis. Applications can be found in blood banks, hospitals, edipemic prevention service, and research institutes, laboratories in electronic and chemical plants and biological engineering institutes.

Axofreeze AUTO-CASCADE SYSTEM

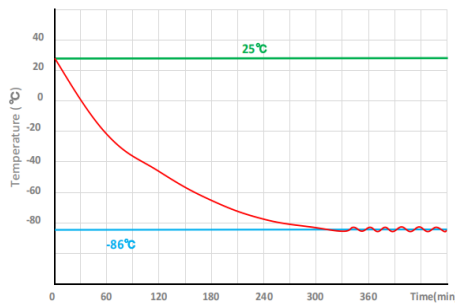


Pull down test at ambient temp. 25°C



Super-cooling technology

The powerful cooling system drives the unique mixed refrigeration system for fast cooling down. This system is stable, energy saving and easy maintenance.

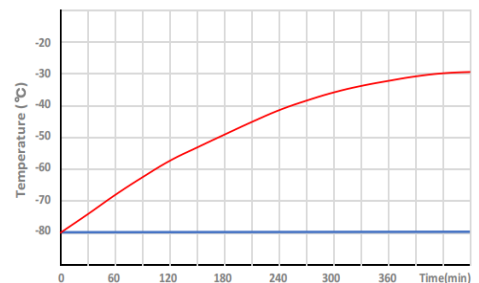


Pull up test at ambient temp. 25°C




Advanced thermal insulation


The insulation are designed with the latest generation of VIP technology to achieve thermal conductivity of 0.005 W(m.K). That makes ULTs more efficient in Insulation and less heat loss, so as to achieve the purpose of energy saving as well as space-saving.

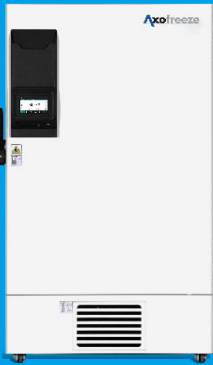

AxoFreeze 728D

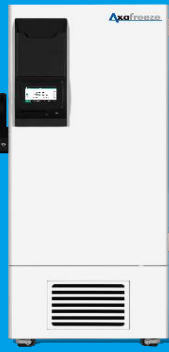

AxoFreeze 588D



AxoFreeze 408E



AxoFreeze 340E



AxoFreeze 58E

58 -838 liters
2,400-60,000
samples

EXTERNAL STRUCTURE



File box

Easy to place log files




Ergonomic handle

Easy open
Lock&keys
Padlock



Quick-release filter

Easy open & Quick clean

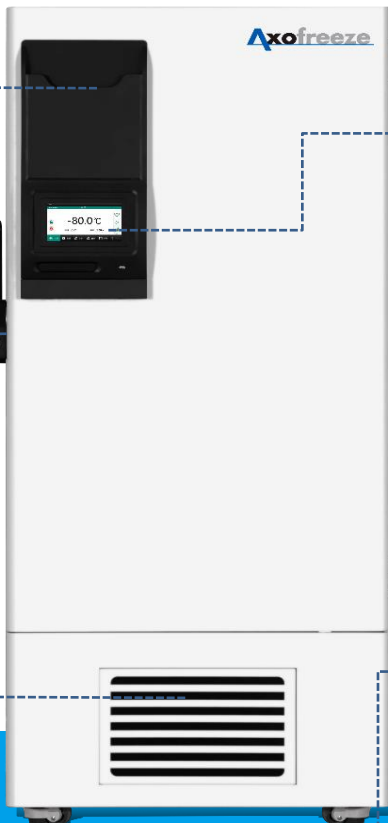

7" touch screen
Vaccum release port
USB data logger



Heavy duty castors
Universal wheels

freezers are made of color spayed anti-bacterial and anti-corrosion cold-rolled steel. Various configurations and humanized designs bring great convenience to users.

Access port



Remote interface
RS232/485

USB interface
Power on/off



FEATURERS



7" LCD touch screen

Easy operation and observation




Smart Operating System

Authorities, alarms, curve & events



Our VIP ■ Thermal Conductivity ■ R-value

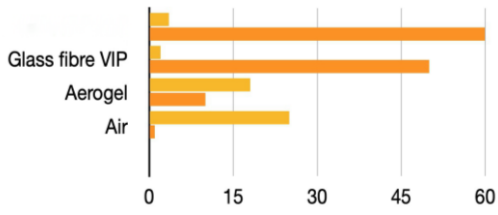

Advanced insulation tech

Fumed Silicon V.I.P & PURF



Multi-layer sealing design

Foamed inner doors with silicon



Eco-friendly

CFC-free refrigerant & insulation



Energy saving

More efficient cooling system




INTERNAL STRUCTURE



Adjustable shelves



PTC sensor



Pressure-regulated inner door handle



Multi-layer silicone sealing gaskets
Low temperature resistance



SUS 304 inner door filled with PURF
Detachable design

ALL
SUS 304
inside



SPECIFICATIONS

Basic		Refrigeration System		Alarms	
Cooling method	Direct Cooling	Refrigerant	R4001(mixed gas)	High/low temperature	Y
Defrost	Manual	Temp. controller	Microprocessor	Power failure	Y
Temperature range	-40°C~-85°C	System	Auto-cascade	Abnormal voltage	Y
Ambient temperature	10~32°C	Sensor	PTC 100	Sensor error	Y
Display	7" LCD touch display	Compressor brand/QTY	SECOP/1	Door ajar	Y
Access port QTY/Dia.	1/25mm	Capacity(L/cu.ft)	408/14.40	Filter screen check	Y
USB Intereface	Yes/1	Insulation	PURF	Thermostat failure	Y
Remote alarm Access	Y	Inner door material/QTY	Foamed SUS304/2	Low battery	Y
RS485 Access	Y	Racks	16(5X5,4X4)	Condenser clean	Y
Outside material	Color sprayed steel	Boxes (2 Inches)	288	High ambient temperature	Y
Inside material	SUS304	Samples(2ml)	28800	Power failure backup (alarm)	72h
Castor	Universal				

Electrical Data		Dimensions		Accessories	
Voltage frequency(V/Hz)	220V 50Hz/60Hz	Package size(W*D*H)(mm)	954×955×2094	Chart recorder	Optional
Power(W)	890W	Exterior size(W*D*H)(mm)	872×1028×1945.5	Data logger	Optional
Current(A)	5.34A	Interior size(W*D*H)(mm)	606*575*1180	CO2 back up system	Optional
		Shipping CBM	1.92	LN2 back up system	Optional
Noise(db)	50	N.W/G.W(kg)	235/279.5	Gloves	Optional

ACCESSORIES



LN₂/CO₂ backup system



Data logger



Chart recorder



Racks & Boxes

Axon Labortechnik GmbH
 Im Braumenstück 16, D-67659 Kaiserslautern
 Tel.: 06223/ 9541190 Email: info@axon-labortechnik.de

Axon www.axon-labortechnik.de