





728 liters  
50,400 samples



### Axofreeze - 728 D - Dual Cooling System

-86°C ULT freezer is specially designed and manufactured for long term storage of various biological products, including viruses, germs, erythrocytes, leucocyte and cutis. Applications can be found in blood banks, hospitals, edipemic prevention service, and research institutes, laboratories in electronic and chemical plants and biological engineering institutes.

### Axofreeze DUAL SYSTEM

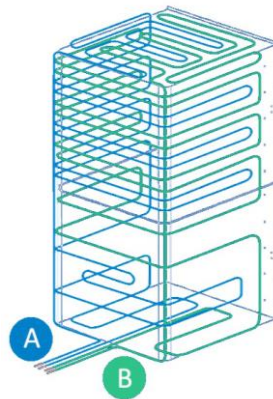



### 2 Independent Cooling System

Dual cooling system is designed with 2 independent cooling systems which provides extra insurance for bio-samples. Dual cooling system maximizes optimal reliability, longevity and efficiency.

### Extreme Safety

Should one system unexpectedly fail, the other will maintain a temperature in the -70°C range ensuring that the sensitive samples not put at risk separately.

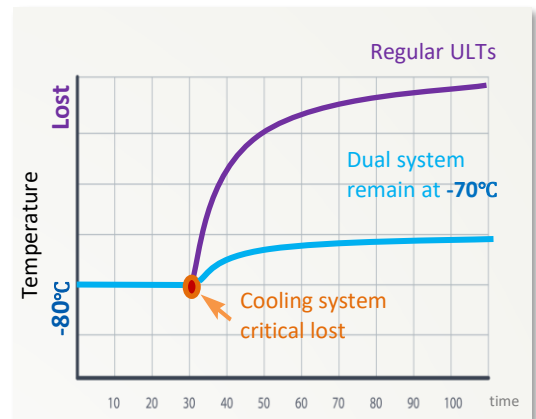

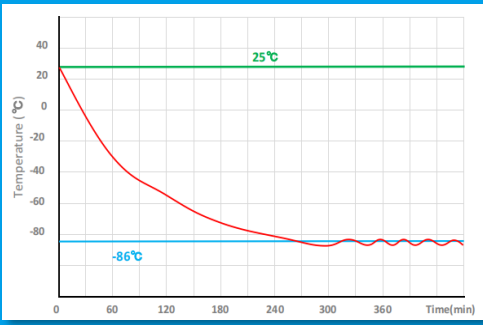

Pull down test at ambient temp. 25°C



## Ultimate cooling performance

Under normal working conditions, the 2 independent systems start in sequence at intervals. Then 2 systems work together to get a rapid pull-down performance.

## EXTERNAL STRUCTURE



### File box

Easy to place log files




### Ergonomic handle

Easy open  
Lock&keys  
Padlock hole



### Quick-release filter

Easy open & Quick clean

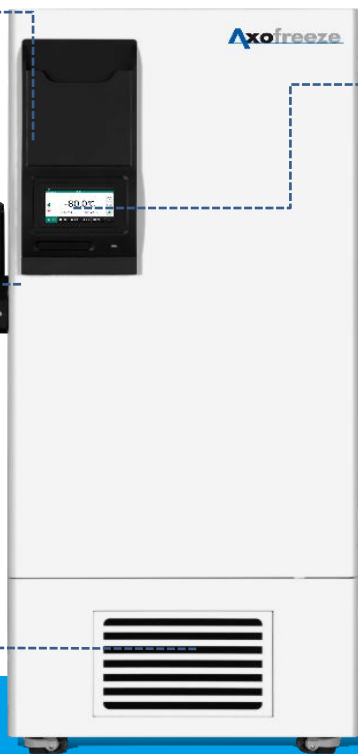

7" touch screen  
Vacuum release port  
USB data logger



### Heavy duty castors

Universal wheels

The ULT freezers are made of color sprayed anti-bacterial and anti-corrosion cold-rolled steel. Various configurations and humanized designs bring great convenience to users.

### Access port



### Remote interface

RS232/485

### USB interface

Power on/off



## FEATURERS




### 7" LCD touch screen


Easy operation and observation



### Smart Operating System

Authorities, alarms, curve & events

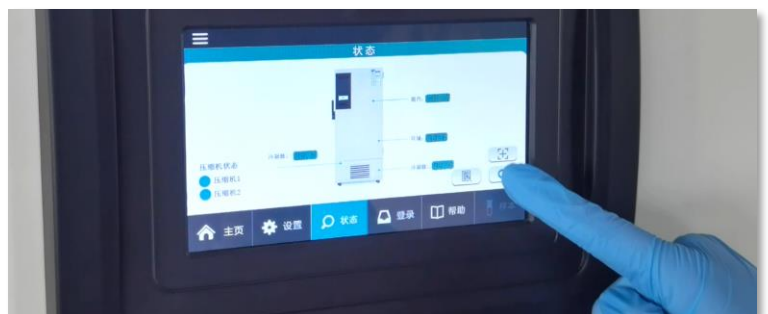

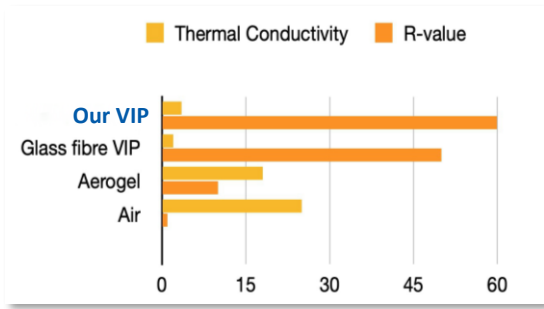

### Advanced insulation tech

Fumed Silicon V.I.P & PURF



### Multi-layer sealing

Foamed inner doors with silicon



### Eco-friendly

CFC-free refrigerant & insulation



### Energy saving

More efficient cooling system




## INTERNAL STRUCTURE



Adjustable shelves



PTC sensor



Pressure-regulated inner door handle



Multi-layer silicone sealing gaskets  
Low temperature resistance



SUS 304 inner door filled with PURF  
Detachable design

ALL  
SUS 304  
inside



# SPECIFICATIONS

Basic		Refrigeration System		Alarms	
Cooling method	Direct Cooling	Refrigerant	R4001(mxed gas)	High/low temperature	Y
Defrost	Manual	Temp. controller	Microprocessor	Power failure	Y
Temperature range	-40°C~-86°C	System	Dual Cooling System	Abnormal voltage	Y
Ambient temperature	10~32°C	Sensor	PTC	Sensor error	Y
Display	LCD touch display	Compressor brand/QTY	SECOP/2	Door ajar	Y
Access port QTY/Dia.	1/25mm	Capacity(L/cu.ft)	728/25.7	Filter screen check	Y
USB Intereface	Yes/1	Insulation	PURF+VIP	Thermostat failure	Y
Remote alarm Access	Y	Inner door material/QTY	Foamed SUS304/2	Low battery	Y
RS485 Access	Y	Racks	18(5x4)+6(6x4)	Condenser clean	Y
Outside material	Color sprayed steel	Boxes (2 Inches)	504	High ambient temperature	Y
Inside material	SUS304	Samples(2ml)	50,400	Power failure backup (alarm)	72h
Castor	Universal				

Electrical Data		Dimensions		Accessories	
Voltage frequency(V/Hz)	220V 50Hz/60Hz	Package size(W*D*H)(mm)	1320*970*2185	Chart recorder	Optional
Power(W)	1400W	Exterior size(W*D*H)(mm)	1248*975*1994.5	Data logger	Optional
Current(A)	10.37A	Interior size(W*D*H)(mm)	963*571*1350	CO2 back up system	Optional
		Shipping CBM	2.79	LN2 back up system	Optional
Noise(db)	53	N.W/G.W(kg)	316/392	Gloves	Optional

# ACCESSORIES



LN2/CO2 backup system



Data logger



Chart recorder



Racks & Boxes

Axon Labortechnik GmbH  
 Im Brauenstück 16, D-67659 Kaiserslautern  
 Tel.: 06223/ 9541190 Email: info@axon-labortechnik.de



[www.axon-labortechnik.de](http://www.axon-labortechnik.de)